



FEATURES

- Reliable, robust design
- Plug & Play
- Versatile mounting arrangements
- Fully compatible with Sextans control application

BENEFITS

- Cost effective solution
- Reliability in industrial installations
- Plug & Play, easy to install and use

APPLICATIONS


- Line integration
- Tooling interface
- Machine control
- Your application

The Pyxis P2010 is a USB based interface with 20 lines of real world I/O, USB and serial ports and is designed to allow a PC system to provide interface and control functions.

An installation can be easily expanded using multiple slave units to provide additional and distributed I/O using Sorion's proprietary CAN based interface.

The Pyxis P2010 offers a cost effective solution providing flexibility of installation and reliability in industrial, scientific, commercial and educational installations.


The Pyxis P2010 is plug-and-play with Microsoft Windows 10.

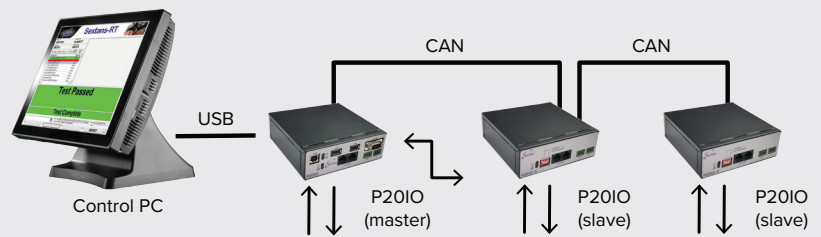

FEATURES

Connectors for interface wiring

- Opto-isolated USB connection to PC (master only)
- Two High-speed USB ports provided by internal USB hub (master only)
- One RS232 Serial Port with 5V power (master only)
- LED Indication of PC connection (master only), fault and slave link status
- Remote slave link using RJ45 cabling


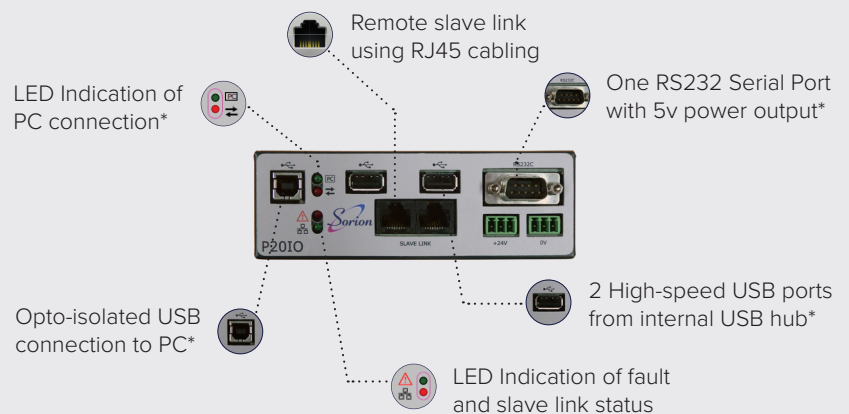


*master only

FEATURES

Two-part Phoenix connectors for I/O wiring providing:

- Eight opto-isolated digital inputs arranged in two banks of four. The common for each bank allows for active high, low or AC operation
- Four volt-free relay digital outputs. The common allows for high, low or AC operation 3amp maximum
- Four high side driver outputs 5V - 30V DC at 3 amps maximum
- Four analogue inputs – 12 bit resolution scaled for 0 - 24V
- 24V DC required for operation

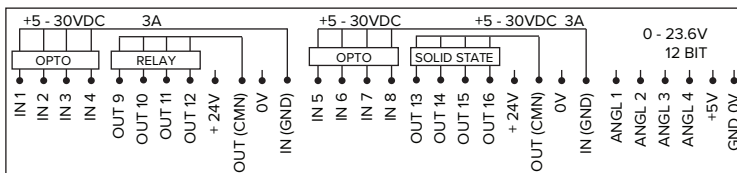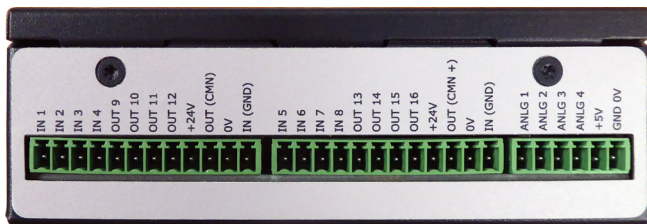

Further Sorion Interfaces

SEL0089

Stand-alone motor control card



KBDEM

USB keyboard input to allow the connection of industrial push-buttons to a PC



REMPB

Wireless Remote for KBDEM



LPSC

USB Control for Intelligent Power Supplies



P16IO

16 channel Digital Input / Output USB module




TECHNICAL DATA

Parameter	Data
Digital Input	8 opto-isolated @ 5-30V
Analogue Input	4 @ 0-24V
Relay Output	4 off volt-free relays @ 3Amp
HSD Output	4 off solid state HSD @ 3Amp
I/O termination	Phoenix two-part connectors
OS Support	Windows 10 - USB interfaced
Dimensions	H 42mm x W 133mm x D 133mm
Part number	SEL0077

INTEGRATION

The Pyxis P20IO is fully supported by Sorion's **Sextans RT** control application and **Orion™** Traceability database to allow deployment of large systems with full central management.

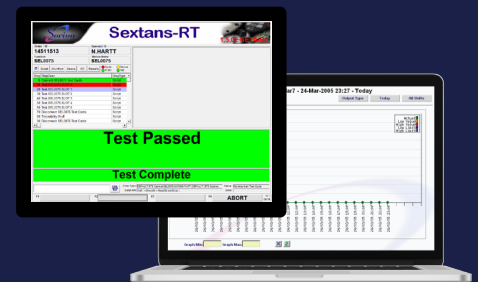

Sorion Electronics Ltd
Magreal Industrial Estate
Freeth Street, Ladywood
Birmingham, B16 0QZ

Tel: **0121 454 8966**
Fax: 0121 454 8970
Email: sales@sorion.co.uk
www.sorion.co.uk

